

## DM CAT Input Card for DM switchers

The DMC-CAT is an input card for a Crestron DigitalMedia™ Switcher, providing one CAT-type DigitalMedia (DM) input. The DM CAT input enables the connection of a DM transmitter or the output of another DM switcher, with a potential cable length up to 450 feet (137 m) using DigitalMedia cable\*.

Additional connections on the card include both HDMI and stereo analog audio pass-through outputs. The HDMI output simply passes the input signal through to feed a local device, or to feed a second DM switcher for output expansion purposes. The analog audio output, which features programmable volume control, breaks out the stereo audio signal from the HDMI input and passes it through to feed a CNX-PAD8A, AAE, or other multi-room audio distribution system.

The DMC-CAT may also be used with the DMCI DigitalMedia Card Interface to provide a DM CAT receiver solution that's perfect for installation in an equipment rack or AV cart, or as a portable display interface. As a DM receiver, and as a DM switcher input card, the DMC-CAT enables EDID signal detection and format management, CEC device control, and audio breakaway.

### SPECIFICATIONS

#### Video

**Input Signal Types:** DM CAT (DigitalMedia over twisted-pair copper wire)

**Output Signal Types:** HDMI and DVI† to switcher backplane and HDMI OUT connector

**Formats:** HDMI v.1.3a w/Deep Color, DVI v.1.0, HDCP v.1.2 content protection support

**Input Resolutions, Progressive:** 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 852x480@60Hz, 854x480@60Hz, 1024x768@60Hz, 1024x852@60Hz, 1024x1024@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1365x1024@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@24Hz (1080p24), 1920x1080@25Hz (1080p25), 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1080@24Hz, 2048x1152@60Hz, plus any other resolution allowed by HDMI v.1.3a

**Input Resolutions, Interlaced:** 720x480@30Hz (480i), 720x576@25Hz (576i), 1920x1080@25Hz (1080i25), 1920x1080@30Hz (1080i30), plus any other resolution allowed by HDMI v.1.3a

**Output Resolutions:** Matched to inputs

#### Audio

**Input Signal Types:** DM CAT

**Output Signal Types:** HDMI (multi-channel) to switcher backplane and HDMI OUT connector, analog stereo 2-channel, allows audio breakaway

**Formats:** Dolby® TrueHD 7.1, Dolby Digital Plus 7.1, Dolby Digital AC3 5.1, Dolby Digital EX 5.1, DTS-HD Master Audio™ 7.1, DTS-HD High Res 7.1, DTS 5.1, DTS-ES Matrix 5.1, DTS-ES Discrete 6.1, DTS 96/24 5.1, 8ch PCM, 6ch PCM, 2ch PCM

**Digital-To-Analog Conversion:** 24-bit 48 kHz

**Performance (analog):** Frequency Response: 20Hz to 20kHz ±0.5dB;

S/N Ratio: >95dB, 20Hz to 20kHz A-weighted;

THD+N: <0.005% @ 1kHz;

Stereo Separation: >90dB

#### Connectors

**HDMI OUT:** (1) 19-pin Type A HDMI female;


HDMI digital video/audio output;

Also supports DVI\*

**DIGITAL MEDIA:** (1) DM CAT input composed of (2) 8-pin RJ45 female;

Connect to DM CAT output of a DM transmitter or other DM device via DM-CBL

or CresCAT-D cable\*

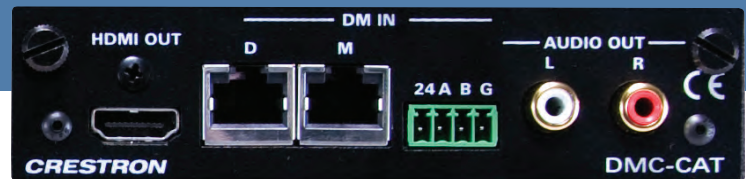

**NET:** (1) 4-pin 3.5mm detachable terminal block, DMNet port;  
Connects to DMNet port of a DM transmitter or other DM device via DM-CBL or CresCAT-D cable\*

**AUDIO OUT:** (2) RCA female;  
Unbalanced stereo line-level audio output with level control;  
Maximum Output Level: 2 V<sub>rms</sub>;  
Output Impedance: 100 ohms nominal

#### Construction

Plug-in card, occupies (1) DM Switcher input card slot, includes steel faceplate w/black matte powder coat finish

### AVAILABLE ACCESSORIES

#### DM-CBL

DigitalMedia™ Cable

#### DM-CONN

DigitalMedia™ Cable Connector

#### CBL-HD

HDMI™ Interface Cable

#### CBL-HD-DVI

HDMI™ to DVI Interface Cable

#### CBL-RCA2

RCA Stereo Audio Interface Cable

#### MP-WP152

Media Presentation Wall Plates – HDMI™

#### MP-WP140

Media Presentation Wall Plates – DVI w/Mini-TRS Stereo Audio

#### MP-WP185

Media Presentation Wall Plate - Crestron DigitalMedia™ CAT w/DMNet

#### DMCI

DigitalMedia Card Interface

\* For DigitalMedia CAT wiring, use DM-CBL DigitalMedia Cable, CresCAT-D, or quality CAT5e/CAT6 cable. Do NOT use low-skew cable. The maximum allowable cable length depends on multiple factors. One or more DM Repeaters (Model DM-DR) may be required. Refer to the Crestron DigitalMedia Design Guide, Doc. #4789 for complete wiring guidelines.

† HDMI requires an appropriate adapter or interface cable to accommodate a DVI signal. CBL-HD-DVI interface cables available separately.



faircom media GmbH • Biggestr.43 • D-57462 Olpe  
Tel.: +49 (0) 2761 8396 0 • Fax: +49 (0) 2761 8396 70  
info@faircom-media.de • www.faircom-media.de