

QuickMedia® Wall Plate Computer Center, Single Input

Crestron MediaManager is a comprehensive family of affordable products fusing high-performance AV signal distribution, device control, and facility-wide system management. MediaManager simplifies the art of Pro AV system design and installation with complete hardware, software, and low-cost wiring solutions. Whether installing a single boardroom or a campus-wide network of AV systems, MediaManager delivers power and value far beyond conventional products and designs.

The QM-WCC-1 QuickMedia Wall Plate Computer Center provides a simple wall mount computer interface solution for any MediaManager system, including applications ranging from small conference rooms to large banquet halls and auditoriums.

Wall Mount Computer Interface

The QM-WCC-1 installs cleanly in a standard electrical box using a decorator style faceplate (not supplied). A single RGB input with stereo audio is provided to accept a connection from a computer or other RGB source.

Connectivity for LAN and other signals can easily be added by ganging the QM-WCC-1 together with other 3rd-party wall plate devices. A Crestron **C2N-DB** or **C2N-CBD** series keypad may also be installed for a truly complete interface and control solution. Wiring for the QM-WCC-1 is extremely simple requiring just a single **CresCAT@QM** cable (sold separately).

Built-in signal sensing can be utilized to trigger automatic input selection and power control.

QuickMedia® Transport

Using the revolutionary QuickMedia transport, input signals are transmitted from the QM-WCC-1 to any QuickMedia Receiver or Distribution Center over a single inexpensive CAT5e type cable*. Computer resolutions up to 1920 X 1200 pixels at 60Hz are supported over cable runs up to 450 feet. Audio signals are transmitted digitally with high-performance 24-bit resolution. QuickMedia dramatically simplifies system design and installation, affording a higher level of performance at a lower overall cost.

MediaManager System Integration

Whether using just one Wall Plate Computer Center or several, complete system operation can be made transparent to the end-user with all signal routing occurring smoothly under the command of the MediaManager control system. Complete MediaManager systems are easy to design, program and adjust from start to finish using Crestron **SystemBuilder™** software.

* For QuickMedia wiring use **CresCAT-QM**, **CresCAT-IM**, or quality CAT5e/CAT6 cable with a delay skew of =15ns per 100m; the maximum aggregate cable length and delay skew between any QM transmitter (origination point) and QM receiver (endpoint) is 450 ft (137 m) and 22 ns; a maximum of two QM midpoint devices may be inserted in a given QM signal path; exceptions apply, refer to each respective product manual for full detail.

> [Wall mount QuickMedia computer interface](#)

> [Single-cable signal transmission up to 450 feet](#)

> [DB15HD RBG computer input](#)

> [Stereo audio input](#)



> [Video input signal sensing](#)

> [QuickMedia transport | Cresnet communications](#)

> [Low-cost, quick and easy installation](#)

> [Integrates with Crestron Cameo and Decorator keypads](#)

> [Installs alongside 3rd-Party LAN jacks and other devices](#)

> [Available in white or black](#)

> [Easy setup using Crestron SystemBuilder software](#)

SPECIFICATIONS

Video

Signal Types: RGB

RGB Formats: RGBHV, RGBS, or RGsB

Gain: 0dB (75 ohms terminated)

Maximum Resolution: 1920 x 1200 @ 60Hz (at unity gain) with maximum cable length of 450 feet and maximum compensation at receiver

Audio

A-D Conversion: 24-bit, 48 kHz

Frequency Response: 20Hz to 20kHz

Connectors - Front Panel

PC: (1) DB15HD female, RGB(VGA) input;

Formats: RGBHV, RGBS, RGsB;

Input Impedance: 75 ohms;

Sync Impedance: 1k ohms;

Maximum Input Level: 1 Vp-p;

Maximum Sync Level: 5 Vp-p;

Signal sensing on H-SYNC only

AUDIO: (1) 3.5mm TRS mini phone jack;

Unbalanced stereo line-level audio input;

Input Impedance: 10k ohms;

Maximum Input Level: 1 Vrms

QM-WCC-1

Connectors - Rear Panel

QM: (1) 8-wire RJ45 female, QuickMedia output port;
Connects to QM input port of any QuickMedia device via **CresCAT-QM** or **CresCAT-IM** cable*

NET: (1) 4-pin 3.5mm detachable terminal block;
Cresnet slave port; connects to Cresnet control network via **CresCAT-QM** or **Cresnet** cable

GROUND: (1) Flying lead, grounding wire

Indicators

PWR: (1) green LED, indicates 24 Volts DC power supplied from Cresnet network

NET: (1) yellow LED, indicates communication with Cresnet system

Power Requirements

Cresnet Power Usage : 4 Watts (0.17 Amp @ 24 Volts DC)

Environmental

Temperature: 41° to 104°F (5° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 14 BTU/Hr

Enclosure

Flush Wall Mount: 1-gang mountable in a standard electrical box (2.1 inch deep minimum); requires Decora-compatible faceplate (not included)

Rack Mount: Mountable to a single 19-inch EIA rack rail

Dimensions

Height: 4.12 in (10.45 cm)

Width: 1.72 in (4.37 cm)

Depth: 1.74 in (4.41 cm)

Weight

8 oz (210 g)

* For QuickMedia wiring use CresCAT-QM, CresCAT-IM, or quality CAT5e/CAT6 cable with a delay skew of ≤ 15 ns per 100m; the maximum aggregate cable length and delay skew between any QM transmitter (origination point) and QM receiver (endpoint) is 450 ft (137 m) and 22 ns; a maximum of two QM midpoint devices may be inserted in a given QM signal path; exceptions apply, refer to each respective product manual for full detail.

Available Models

QM-WCC-1-B-T: QuickMedia® Wall Plate Computer Center, Single Input, Black

QM-WCC-1-W-T: QuickMedia® Wall Plate Computer Center, Single Input, White

Available Accessories

CBL-AUDIO-1.5: Crestron® Certified Mini-TRS Stereo Audio Interface Cable, 1.5 ft

CBL-AUDIO-12: Crestron® Certified Mini-TRS Stereo Audio Interface Cable, 12 ft

CBL-AUDIO-3: Crestron® Certified Mini-TRS Stereo Audio Interface Cable, 3 ft

CBL-AUDIO-6: Crestron® Certified Mini-TRS Stereo Audio Interface Cable, 6 ft

CBL-VGA-1.5: Crestron® Certified Computer VGA Interface Cable, 1.5 ft

CBL-VGA-12: Crestron® Certified Computer VGA Interface Cable, 12 ft

CBL-VGA-25: Crestron® Certified Computer VGA Interface Cable, 25 ft

CBL-VGA-3: Crestron® Certified Computer VGA Interface Cable, 3 ft

CBL-VGA-50: Crestron® Certified Computer VGA Interface Cable, 50 ft
[Available April, 2010]

CBL-VGA-6: Crestron® Certified Computer VGA Interface Cable, 6 ft

CBL-VGA-75: Crestron® Certified Computer VGA Interface Cable, 75 ft
[Available April, 2010]

CBL-VGA-AUD-12: Crestron® Certified Computer VGA Interface Cable w/
Audio, 12 ft

[Release Date: TBA]

CBL-VGA-AUD-25: Crestron® Certified Computer VGA Interface Cable w/
Audio, 25 ft

[Release Date: TBA]

CBL-VGA-AUD-3: Crestron® Certified Computer VGA Interface Cable w/
Audio, 3 ft

[Release Date: TBA]

CBL-VGA-AUD-50: Crestron® Certified Computer VGA Interface Cable w/
Audio, 50 ft

[Release Date: TBA]

CBL-VGA-AUD-6: Crestron® Certified Computer VGA Interface Cable w/
Audio, 6 ft

[Release Date: TBA]

CBL-VGA-AUD-75: Crestron® Certified Computer VGA Interface Cable w/
Audio, 75 ft

[Release Date: TBA]


CRESCAT-QM-NP-SP500: QuickMedia® Cable, Low-skew CAT5e & Cresnet,
non-plenum, 500 ft spool

CRESCAT-QM-P-SP500: QuickMedia® Cable, Low-skew CAT5e & Cresnet,
plenum, 500 ft spool



faircom media GmbH • Biggestr.43 • D-57462 Olpe
Tel.: +49 (0) 2761 8396 0 • Fax: +49 (0) 2761 8396 70
info@faircom-media.de • www.faircom-media.de

QM-WCC-1

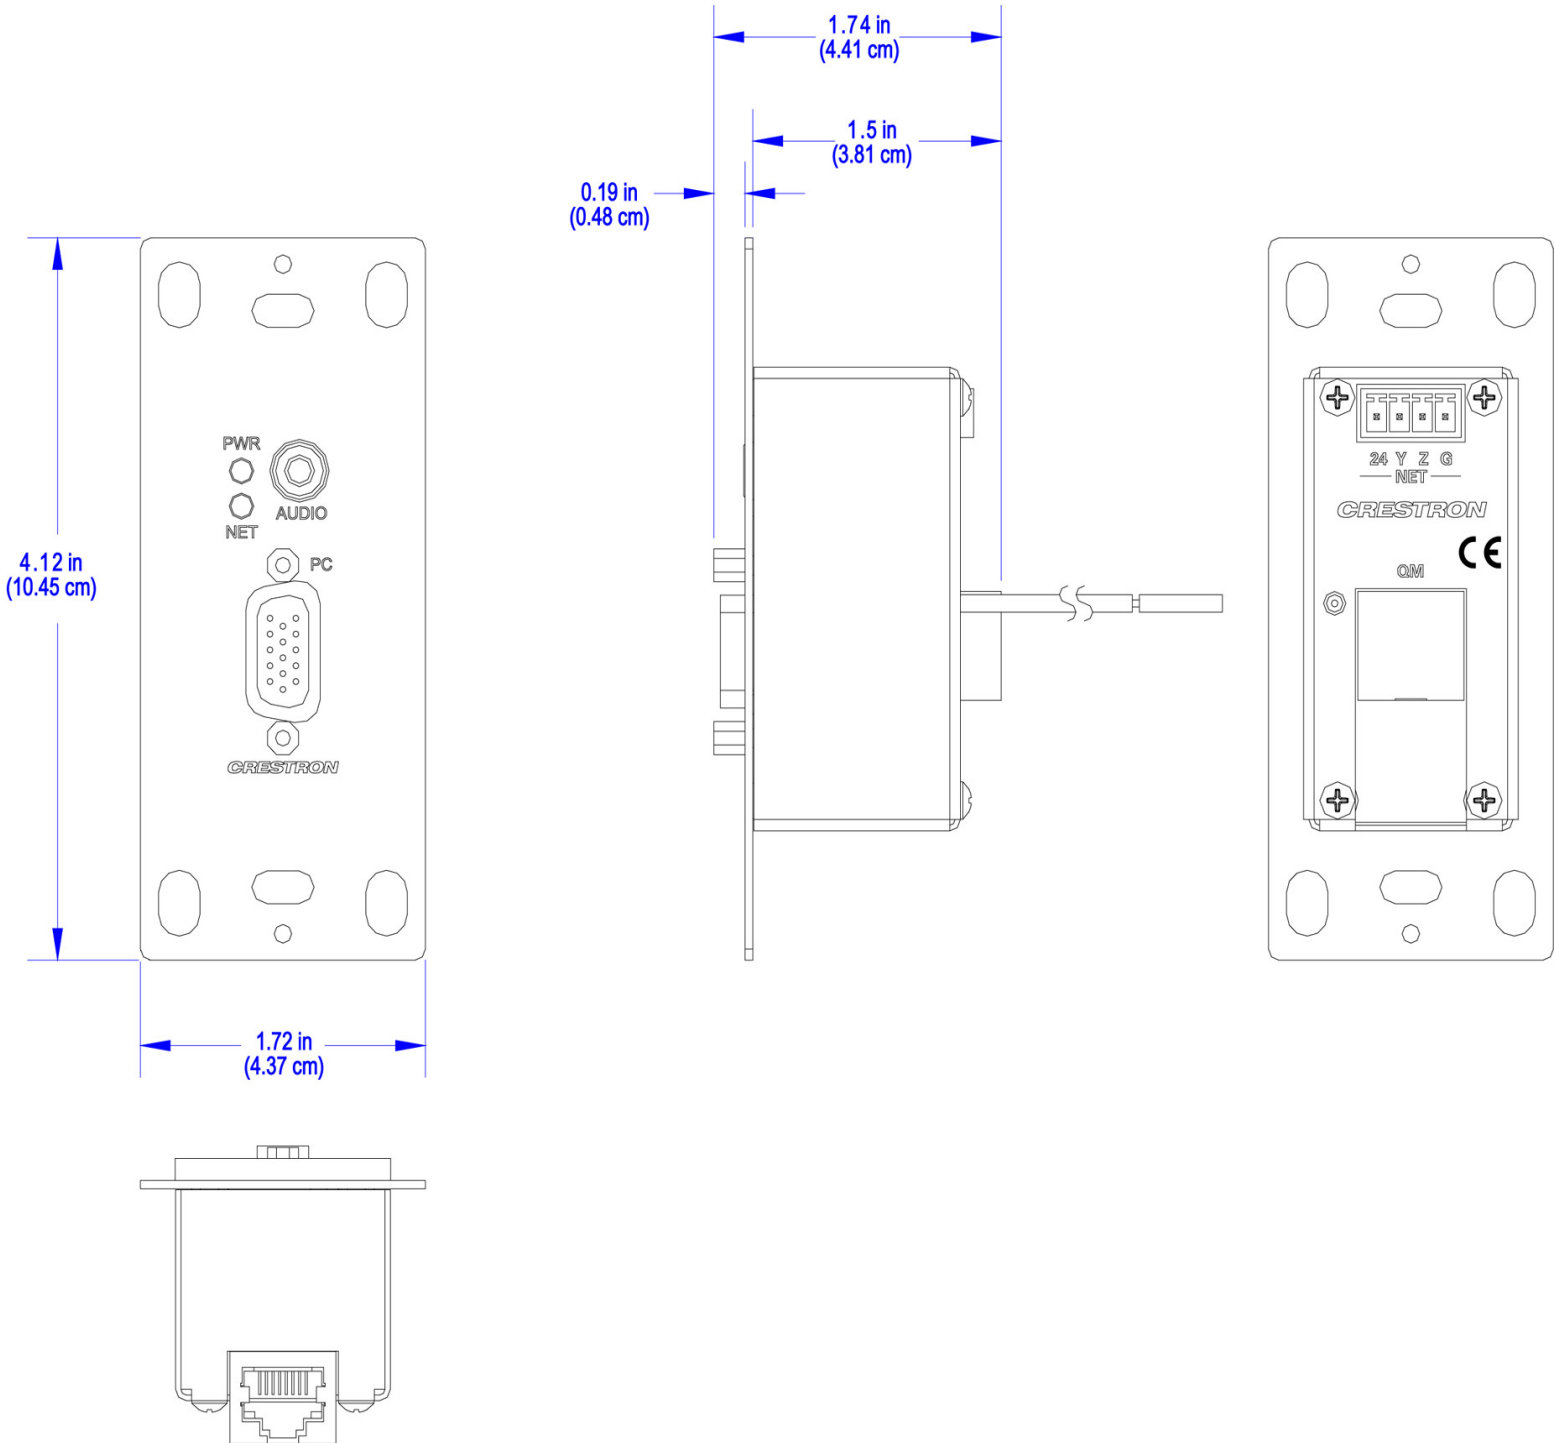

faircom media GmbH • Biggestr.43 • D-57462 Olpe
Tel.: +49 (0) 2761 8396 0 • Fax: +49 (0) 2761 8396 70
info@faircom-media.de • www.faircom-media.de