

Crestron MC2E Ethernet Control System



The MC2E is a low-cost 2-Series Ethernet control system that features a built-in Web server and supports a wide variety of control formats, including IR, RS-232, and TCP/IP.

Power—The heart of the MC2E is the 2-Series processor, built on Motorola's 32-bit, 257 MIPS ColdFire® technology. The MC2E features the same processor as the higher end PRO2 and AV2, with 36MB of onboard memory, allowing the MC2E to run the most sophisticated control applications.

Versatility—I/O options include 2 bi-directional COM ports with built-in serial drivers for controlling devices via RS-232/RS-422/RS-485; 4 IR/serial ports, programmable with the thousands of device drivers available in the Crestron databases; 4 Versiports configurable for analog input or digital I/O; 4 isolated relays for controlling contact closure devices; 1 Cresnet port for seamless integration with Crestron touchpanels and network control modules; 1 10/100 Ethernet port; and 1 IR input designed to work with the CNXRMIRD IR detector and any universal RC-5 IR remote, for low-cost control of AV devices.

e-Control 2™ Technology—The MC2E features a built-in Web server with SSL, so users can control devices from any computer on the LAN or WAN. Programmers can design custom Web pages using Crestron VisionTools Pro-e®, eliminating the need to purchase third-party Web page design software.

In fact, with Crestron e-Control 2® XPanel technology, Web pages have the same look and feel as TPS touchpanel pages, with the same outstanding

runtime performance. e-Control 2 also generates stand-alone XPanel programs that users can launch from their Windows desktop or from Windows PocketPC 2002 devices and Windows Tablet PCs.

The MC2E supports all Crestron e-Control Power Applications, including RoomView™ software. With RoomView, organizations can monitor multiple room AV controllers on an integrated Ethernet network, in real time, from any network PC.

- > 2-Series processor built on Motorola's 32-bit 257 MIPS ColdFire® technology
- > 2 bi-directional COM ports
- > 4 IR/serial ports
- > 4 Versiports
- > 4 isolated relays
- > 1 IR input compatible with universal IR remotes
- > 10/100BaseT full duplex Ethernet port
- > 1 Cresnet port
- > Built-in Web server for remote browser/XPanel control
- > DHCP/DNS enabled with SSL (Secure Sockets Layer)
- > PW-2410 power supply included

Crestron MC2E Ethernet Control System

Processor

CPU: 32-bit Motorola ColdFire® 5407 Microprocessor

Processing Speed: 257 MIPS (Dhrystone 2.1)

Memory

4MB Flash
32MB SDRAM
256KB NVRAM

Connectors

COM: (2) DB9
2-way RS-232/422/485

Relays: (4) 2-pin mini Phoenix
Normally open, isolated relays
Rated 1A, 30 Volts AC/DC
MOV arc suppression across contacts

I/O Versiports: (4) 1-pin mini Phoenix
Digital input/output or analog input
Digital input: Rated for 0-24 Volts DC; input impedance 20K ohms; logic threshold 1.24 Volts DC
Analog input: Rated for 0-10 Volts DC, protected to 24 Volts DC maximum; input impedance 20K ohms
Programmable 5V, 2K ohms pull-up resistor per pin (software reference to GND or closure to GND)

IR: (4) 2-pin mini Phoenix
IR, TTL Level, 1-way RS-232
Individual signal plus ground per port
IR output up to 1.2 MHz
Individual signal generator per port, allowing simultaneous firing of all ports

IR Receiver: (1) 3-pin female mini Phoenix
For connection to the CNXRMIIRD and any universal RC-5 IR remote

Computer: (1) DB9
RS-232 connection to a PC

Cresnet: (1) 4-pin mini Phoenix

Ethernet: (1) RJ-45
10/100BaseT full duplex

Power: 24 Volts DC power jack (PW2410RU power supply included)

Reset Buttons

HW-R: Hardware reset (reboots the control system)

SW-R: Software reset (reloads the logic program)

LED Indicators

PWR: Green power LED

NET: Yellow network activity LED

ERR: Red error LED

Power Requirements

10 Watts (0.21 Amps @ 24 Volts DC)
PW-2410RU power supply included
Available Cresnet power: 14 Watts

Dimensions


Height: 1.7 in (4.32 cm)

Width: 19.0 in (48.26 cm)

Depth: 8.5 in (21.59 cm)

Weight

4.3 lbs (2.0 kg)

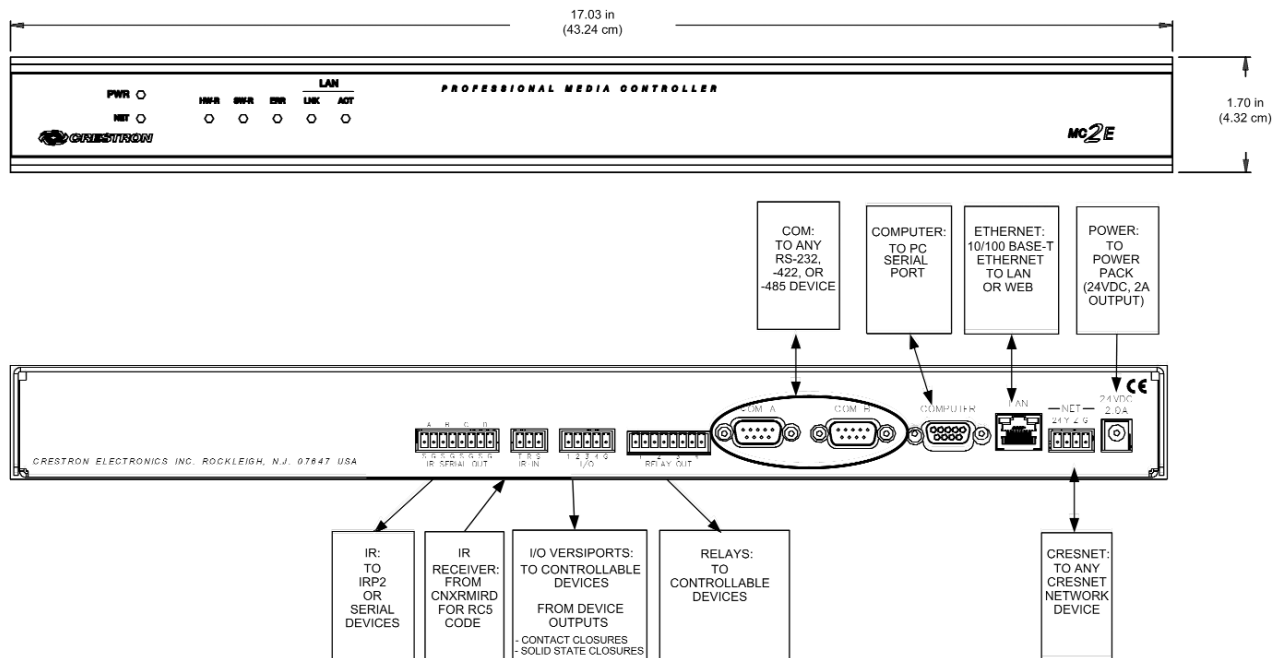

NEW YORK
LOS ANGELES
ATLANTA
DALLAS

CHICAGO
TORONTO
MEXICO CITY
BRUSSELS

MUNICH
LONDON
PARIS
HONG KONG

BEIJING
SINGAPORE
TAIPEI
MELBOURNE

Crestron Electronics, Inc. 15 Volvo Drive • Rockleigh, NJ 07647
Tel: 800.237.2041 / 201.767.3400 • Fax: 201.767.7576 • www.crestron.com