

DMC-VID-BNC

BNC Analog Video Input Card for DM Switchers

The DMC-VID-BNC is an input card for a Crestron DigitalMedia™ Switcher, providing one analog video input and one balanced stereo analog audio input. The DMC-VID-BNC accepts component HDTV signals up to 1080p60, as well as standard definition NTSC/PAL composite and S-Video. An HDMI pass-thru output connection is also provided, which passes the audio and video input signals through digitally to feed a local device, or to feed a second DM switcher for output expansion purposes.

SPECIFICATIONS

Video

Signal Types: Component (YPbPr), S-Video (Y/C), or composite input; HDMI converted pass-thru

Formats: HDTV up to 1080p60, NTSC or PAL

Input Resolutions, Component: 480i, 576i, 480p, 576p, 720p50, 720p60, 1080i25 (1125 lines), 1080i30, 1080p24, 1080p25, 1080p30, 1080p50 (1125 lines), 1080p60

Input Resolutions, Composite and S-Video: 480i, 576

Output Resolutions: Matched to inputs

Analog-To-Digital Conversion: 10-bit 170 MHz

Audio

Signal Types: Analog stereo input, HDMI converted pass-thru

Formats: Stereo 2-Channel

Analog-To-Digital Conversion: 24-bit 48 kHz

Performance (analog): Frequency Response: 20Hz to 20kHz ± 0.75 dB;

S/N Ratio: >95dB, 20Hz to 20kHz A-weighted;

THD+N: <0.005% @ 1kHz;

Stereo Separation: >90dB

Connectors

HDMI OUT: (1) 19-pin Type A HDMI female;

HDMI digital video/audio output;

Provides pass-thru signal from IN connections for system expansion

IN - Y, Pb/Y, Pr/C/COMP: (3) BNC female comprising (1) auto-sensing multi-format analog video input;

Signal Types: Component (YPbPr), S-Video (Y/C), or composite input;

Input Level: 1 Vp-p nominal;

Input Impedance: 75 ohms nominal

IN - AUDIO: (1) 5-pin 3.5mm detachable terminal block;

Balanced/unbalanced stereo line-level input;

Input Impedance: 24k ohms balanced/unbalanced;

Balanced Input Level: 4 Vrms maximum;

Unbalanced Input Level: 2 Vrms maximum

Construction

Plug-in card, occupies (1) DM Switcher input card slot, includes steel faceplate w/black matte powder coat finish

Available Models

DMC-VID-BNC: BNC Analog Video Input Card for DM Switchers

Available Accessories

CBL-HD-1.5: Crestron® Certified HDMI™ Interface Cable, 1.5 ft

CBL-HD-12: Crestron® Certified HDMI™ Interface Cable, 12 ft

CBL-HD-20: Crestron® Certified HDMI™ Interface Cable, 20 ft

CBL-HD-3: Crestron® Certified HDMI™ Interface Cable, 3 ft


CBL-HD-30: Crestron® Certified HDMI™ Interface Cable, 30 ft

CBL-HD-6: Crestron® Certified HDMI™ Interface Cable, 6 ft

CBL-HD-DVI-1.5: Crestron® Certified HDMI™ to DVI Interface Cable, 1.5 ft

CBL-HD-DVI-12: Crestron® Certified HDMI™ to DVI Interface Cable, 12 ft

CBL-HD-DVI-20: Crestron® Certified HDMI™ to DVI Interface Cable, 20 ft

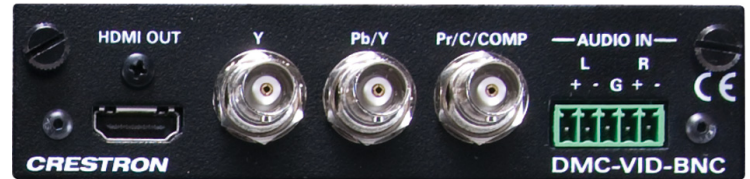

CBL-HD-DVI-3: Crestron® Certified HDMI™ to DVI Interface Cable, 3 ft

CBL-HD-DVI-30: Crestron® Certified HDMI™ to DVI Interface Cable, 30 ft

CBL-HD-DVI-6: Crestron® Certified HDMI™ to DVI Interface Cable, 6 ft

DMCI: DigitalMedia™ Card Interface

MP-WP140-B: Media Presentation Wall Plate, Black - DVI-I w/Mini-TRS Stereo Audio

MP-WP140-W: Media Presentation Wall Plate, White - DVI-I w/Mini-TRS Stereo Audio

MP-WP152-B: Media Presentation Wall Plate, Black - HDMI

MP-WP152-W: Media Presentation Wall Plate, White - HDMI

DMC-VID-BNC BNC Analog Video Input Card for DM Switchers

